Blast Chiller

Main Features

SMART CHILL - Variable air velocity.

RC11 - 11kg Blast Chill capacity per cycle. RC25 - 25kg Blast Chill capacity per cycle. Food product is required to be correctly portioned in Gastronorm pans.

- Removable and adjustable shelf runners able to accept Gastronorm pans.
- Temperature display in °C.
- Mode selection timer or four point Frigiprobe by internal food temperature.
- Automatic preservation mode at the end of cycle.
- Defrost feature removes ice from evaporator.
- R404A refrigerant CFC free.
- Self-closing door magnetically seals. Door remains open past 90°C for convenient loading and unloading.
- Internal coved corners, removable door gasket.
- Water protection index rating IP459.
- Adjustable legs for levelling.

RR11A Air cooled condensing unit RR25A Air cooled condensing unit **RR25S** Remote condensing unit version

(Remote condensing unit not included.)

Description

Foodservice & Bakery Reach-In Blast Chiller/Freezer designed to accept Gastronorm 1/1 pans




Way to Chill




SMARTCHILL

RR11A Blast Chill

Specifications

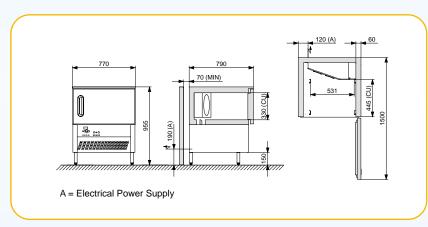

RR11A

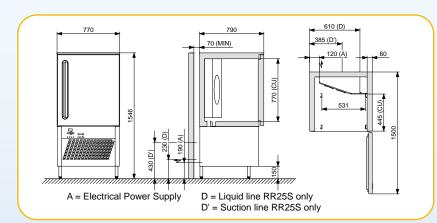

RR25A **RR25S**

Refrigeration Equipment RR25S only

- Complete remote condensing unit. Suitable for local conditions.
- Condensing capacity upright Blast Chiller 930/1900W for the respective evaporation temperatures of -20/0°C.
- Remote condensing unit with 'pump down' control.

RR11A

Dimensions

W 770mm x D 790mm x H 955mm

Kg capacity per cycle

Blast chilling from +70°C to +3°C temperature, capacity per cycle 11kg

Electrical rating

230 - 240Vac 1P+N+E 50Hz 2100W

Refrigerant type

R404A

Standard pan capacity

3 GN 1/1 capacity

Clearances

Top 70mm; Side 70mm

RR25A, RR25S

Dimensions

W 770mm x D 790mm x H 1546mm

Kg capacity per cycle

Blast chilling from +70°C to +3°C temperature, capacity per cycle 25kg

Electrical rating

230 - 240Vac 1P+N+E 50Hz A 2280W; S 450W

Refrigerant type

R404A

Standard pan capacity

7 GN 1/1 capacity

Clearances

Top 70mm; Side 70mm





Disclaimer:

All unit capacities are based on subjective testing. Moffat accepts no liability for production values.





Australia

Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 www.moffat.com.au

New South Wales Telephone 02-8833 4111

Telephone 08-8274 2116 Email dmiller@moffat.com.au

Oueensland Telephone 07-3630 8600 Email aldsales@moffat.com.au Email nswsales@moffat.com.au

Telephone 08-9305 8855 Email jberent@moffat.com.au

New Zealand Moffat Ltd

Christchurch Telephone 03-389 1007 Fmail sales@moffat.co.nz www.moffat.co.nz Telephone 09-574 3150 Email sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Ltd. reserves the right to change specifications and design without notice.

Copyright Moffat Ltd

Moffat/2475/BH/3M/9.02